


Data sheet EN 332 - Side panelling perforated plate

Urban Systems

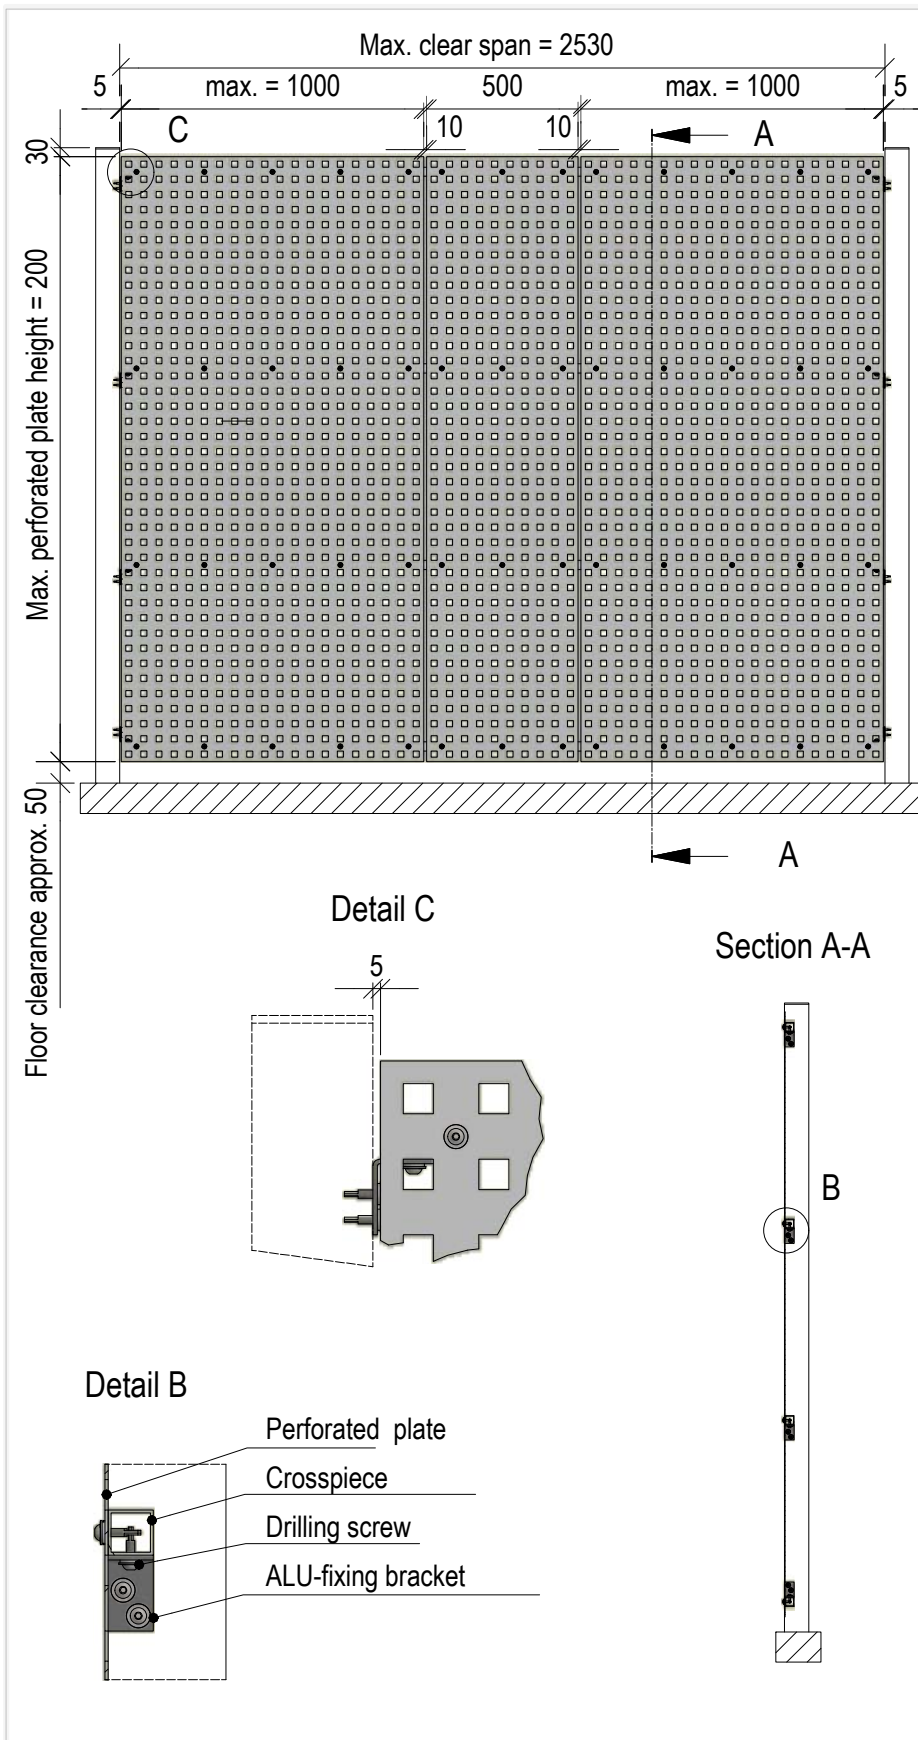

Product description:

Steel perforated plate with square perforations Qg 20-50

Material thickness: 1,5 mm

For clear spans of > 1010 mm, multiple plates are installed side by side with a 10-mm gap

Asymmetrical composition

Max. element height: 2000 mm

Max. element width: 2530 mm

Crosspieces 30x30 mm

Centre distance: max. 750 mm

ALU-fixing bracket 50x30 mm

Elements are mounted between the supports, front edge of the element flush with the support

V2A screw

The screw heads on the outside surface are matched to the colour of the perforated plate

