



Data sheet EN 362 - Locks and handles for suspended sliding gates

Urban Systems

Hook lock



Hook lock for 2 profile cylinders with lock case



**Product description:**

Fittings: Fixed handle / ball handle – movable, anodized aluminium

Rosettes: Anodized aluminium

Profile cylinder length with Classification 30/30

Standard mortise lock: DIN left/right symmetrical


Mortise lock with double PC: DIN left/right symmetrical

Triangle cam for refuse collection: 8 mm


Triangle cam for fire brigade access: 17 mm, with welded-on retaining ring

Handle variants for hook locks:


Handle (standard)  
 -can be moved on both sides  
 -Hook lock with double cylinder

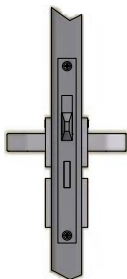

Ball handle  
 -can't be moved on the outside  
 Handle  
 -can be moved on the inside

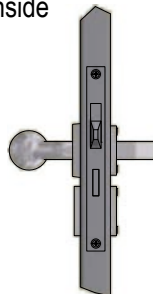


Ball handle  
 -can be moved on both sides

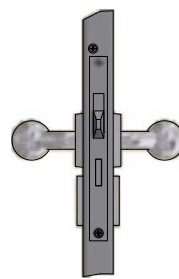

Hook lock options for 2 profile cylinders with lock case

Hook lock with triangle cam for refuse collection

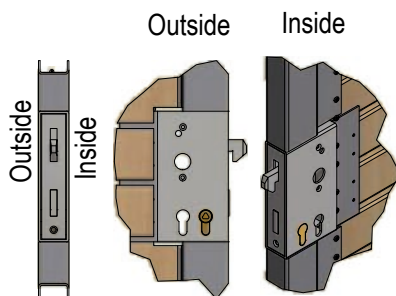

Hook lock with triangle cam for fire brigade access

