




Section A-A

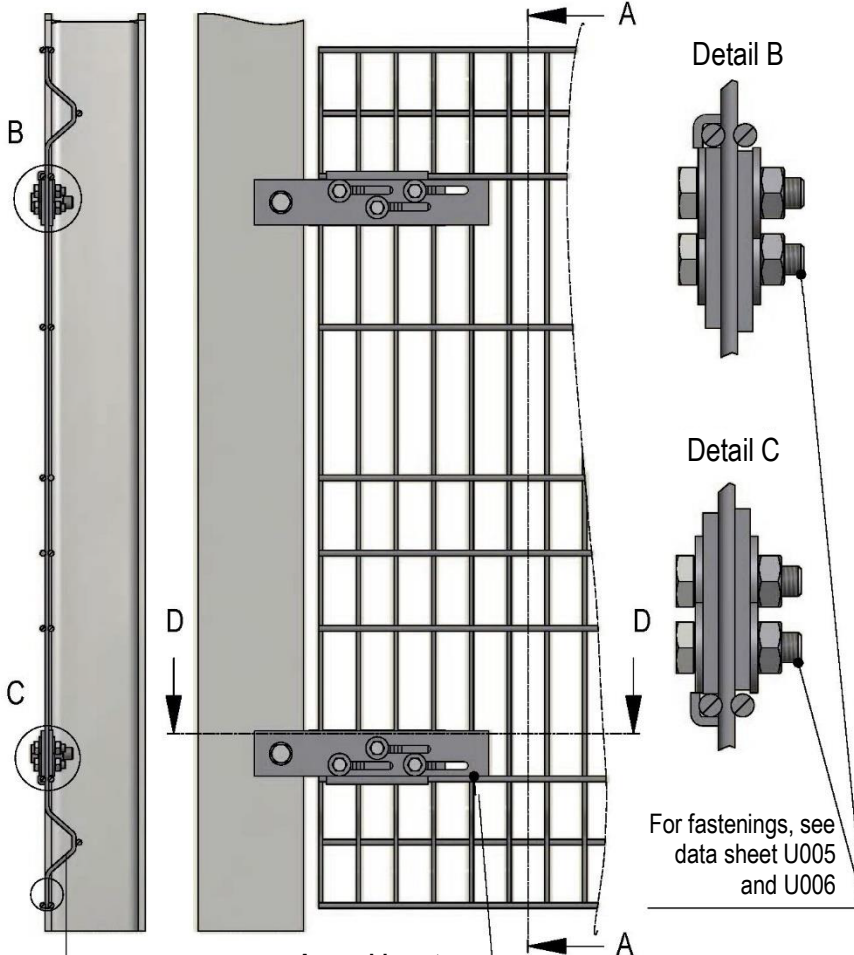

Note:

An extended ramp flange is used for connections in ramp inclines.

Tightening torques for bolts:  
M10 = 30 Nm  
M16 = 100 Nm



For fastenings, see data sheet U005 and U006

Assembly notes:

The crest must always be placed in the first grid field of the INTEGRA-pw starting with the first grid field, so that a maximum slipping distance is achieved.

The bulges can point either towards or away from the parking deck.

Section D-D

