



1. Steel mesh mat 1143 can be adapted on site using an angle grinder or similar device if necessary. It is important to recoat all cut edges with corrosion protection after adjustments have been made.
2. Possible examples of adjustments that can be made to steel mesh mats are shown in the sketch below.
3. Restoring the corrosion protection:
 Apply the included repair agent in accordance with the enclosed manufacturer's instructions.
 Then install the fastening sets as shown in the sketch.

INTEGRA-pw steel mesh mat 1143 without examples of adaptations and fastening sets.

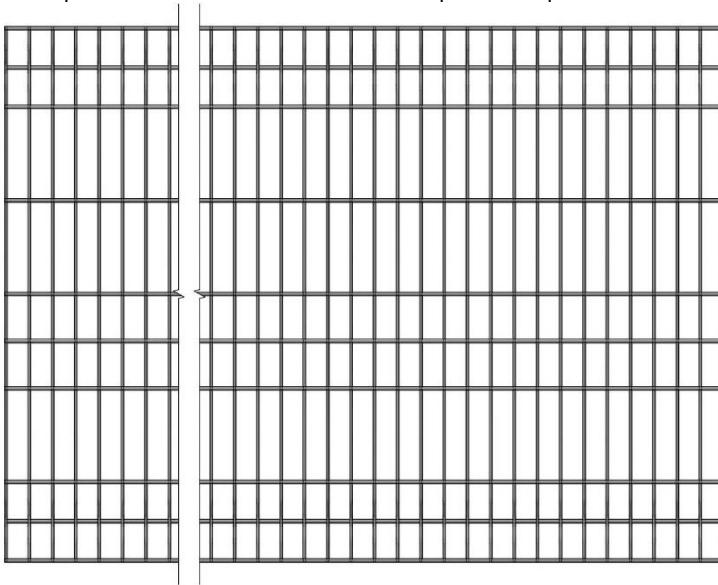

INTEGRA-pw steel mesh mat 1143 with examples of adaptations and fastening sets

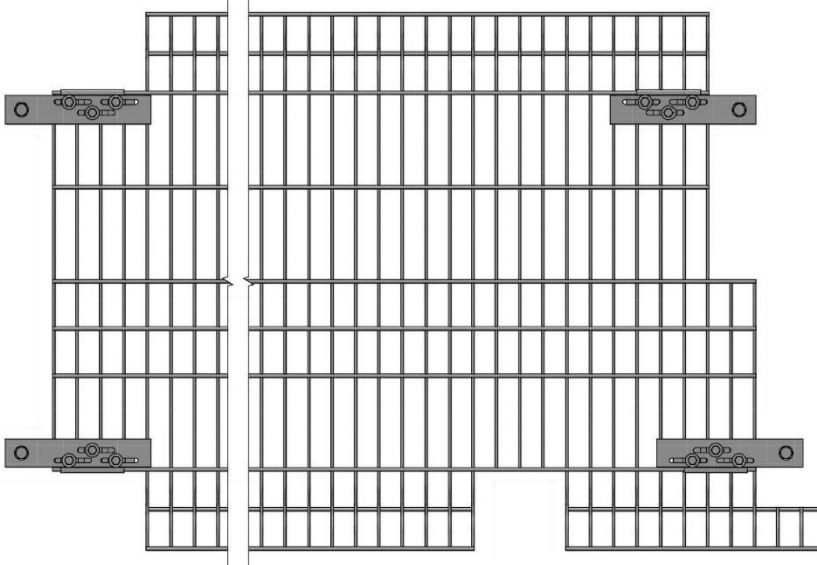

Technical data:

Repair agent (included):

- LZ-09 thick-film zinc repair compound
- Paintbrush