

Technical data:

Dimensions: INTEGRA-pw 943-RD

Mesh size: 50 x 100/200 mm

Max. element width: 5506 mm

Produced in the grid of 50 mm

Material: Steel S235

Fastening flange S355

Surface: Hot-dip galvanised in accordance with EN ISO 1461

Optional: Powder-coating

Dynamic impact in accordance with EN 1991-1-7

Case example with car 10km/h and 2.5t:

Mat length: 4706 mm

Deflection: 240 mm


Connecting forces: 41 kN per conn.

More INTEGRA-pw Data sheets:

DE/en 212 - Fastening set

DE/en 213 - Installation details

DE/en 216 - drilling template system heights 1000

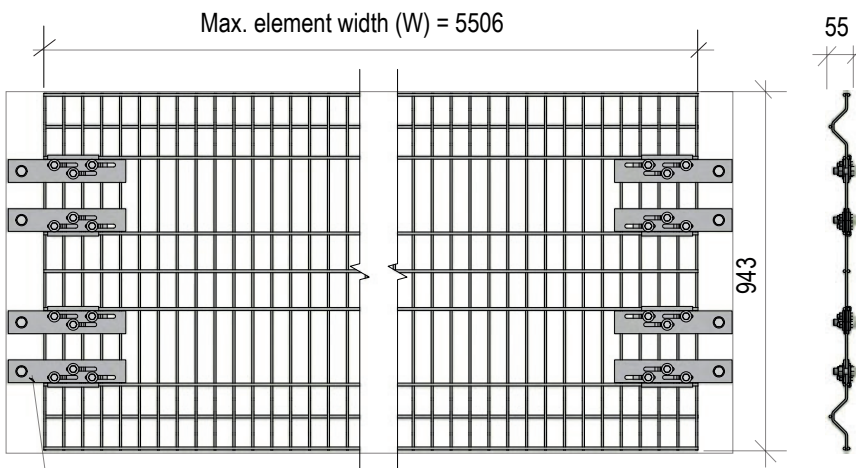

Scope of supply INTEGRA-pw fastening set comprising:

- 8x INTEGRA-pw crest
- 8x INTEGRA-pw fastening flange
- 8x INTEGRA-pw counter flange
- 8x hexagonal bolt ISO 4017 - M16x45 - 8.8 - hdg incl. nut and washer
- 24x hexagonal bolt ISO 4017 - M10x35 - 8.8 - hdg incl. nut and washer

